

S I G N A T U R E
collection


ago

This modular unique design brings an understated elegance to any project. Inspired by «the threading of a needle» it shows the flare and imagination of our designers.

The Ago uses an ingenious aluminium casting method to achieve angles from 0 – 15° in 5° intervals. This method enables lighting levels to be adjusted and directed to suit the projects specific requirements.

Specifications

Ago bracket is made by sand casting with AlSi7Mg aluminium alloy. Ago can be tilted from 0 to 15° at 5° intervals thanks to its indexing in cast aluminium. Available in single or twin arm. Steel shaft is made with high strength steel S420. The tube's seam weld is formed by Plasma, and is smooth with no visual appearance. Minimum taper rate 15mm/m. Available from 4.00m to 8.00m high and with 0.75 and 1.20m span. Finish: Baked polyester powder coat. Equipped with Soprano hinge door as standard. Designed according to EN40 Standard and CE marked.

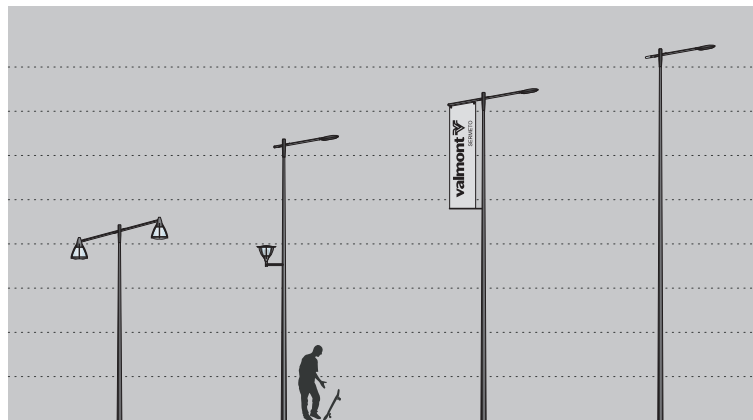

Technical data

m		mm		mm		mm		mm		mm		mm		mm			
4	0.75	60	118	400	75	500	56x70	200	J16/14 x 300	0.4x 0.6	0.5	800	1000	1200	1200		
5			134													74x70	1200
6			150													91x70	
7	1.2	60	167	500	85	101x85	300	J20/18 x 300	0.5x 1	0.6	1200	1200	1200	1200			
8			183												119x85		

Design by Greench.