

V E R T I C A L  
collection


Fluance

Fluance

A decorative, steel, conical and curved mast. Fluance is a decorative product in its simplest format. Pure elegance. Fluance can be used with side-fitting or suspended lighting.

Specifications

Fluance enables lighting to be offset by 0.50 - 1.50m. The angle at the end of the mast arm is 5°. Can be adapted to a range of heights, from 6m00 to 10m00. Steel shaft is made with high strength steel S420. The tube's seam weld is formed by Plasma, and is smooth with no visual appearance. The shaft is then bended on an adapted form. Minimum taper rate 15mm/m. Available from 6.00m to 12.00m high and with 0.50 to 1.50m span. Finish: Baked polyester powder coat. Equipped with Soprano hinge door as standard. Designed according to EN40 Standard and CE marked.

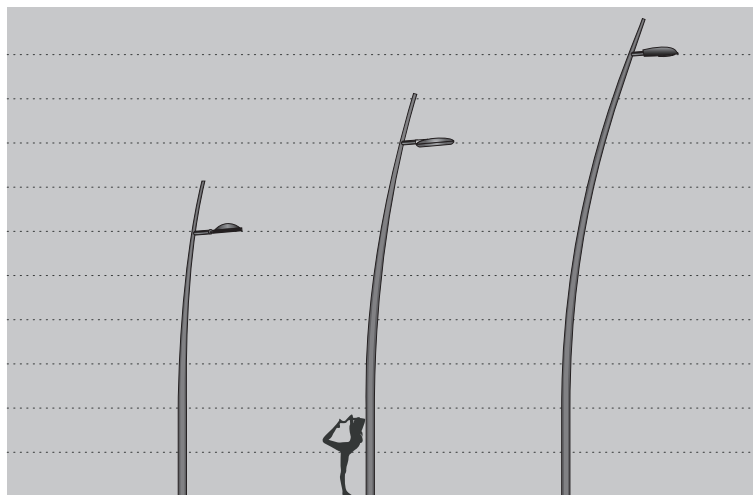

Technical data

| m  | mm | mm  | mm  | mm | mm  | mm     | mm | mm  | mm                  | m   | m   | m    |
|----|----|-----|-----|----|-----|--------|----|-----|---------------------|-----|-----|------|
| 6  |    | 151 |     | 85 |     | 82x95  |    |     |                     | 0.8 |     | 1000 |
| 7  |    | 171 |     |    |     | 100x90 |    |     |                     | 0.5 | 0.9 | 1200 |
| 8  | 60 | 183 | 500 | 90 | 500 | 115x90 |    | 300 | J20/M18<br>x<br>400 | 1   |     | 1500 |
| 9  |    | 203 |     |    |     | 135x90 |    |     |                     | 0.6 |     | 1700 |
| 10 |    | 215 |     |    |     | 136x90 |    |     |                     | 1.1 | 0.6 | 1700 |