



V E R T I C A L
collection


Cityquartz

Cityquartz

The inspiration for this decorative steel mast is from the ancient columns used in Greek architecture. A timeless product suitable for stylish and contemporary lighting.

Specifications

Cityquartz / Fluted poles are formed from tubes conforming to the ASTM A595 process with a constant linear taper of 11.7mm/m. The tube's seam weld is formed by the Electric Resistance Weld (ERW), and is smooth with no visual appearance. The poles are cold rolled over a precision hardened steel mandrel to form the 16 sharp fluted shape. The fluted shaft has uniform Doric flutes. The flutes are formed with rollers in full contact with the material from the top of the crest, through the valley of the flute, to the top of the next crest. The termination of the flutes is at least 300mm from the base to ease installation and ground Finish. Available in 4.00 - 5.00 - 7.00 and 9.00m high. Finish: Baked polyester powder coat. Door equipped with an anti-theft cable as standard. Designed according to EN40 Standard and CE marked.

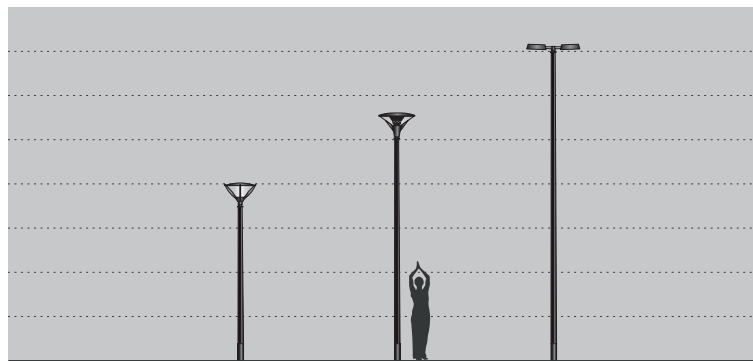

Technical data

Pole Dimensions							Luminaire Options				
m	mm	mm	mm	mm	mm	mm	mm	mm	m	m	m
3.5		129		80		65x75	200	J16/M14 x 300	0.4	0.5	1000
4	89	134	500	90	600	70x70			0.7		
5		147		92		80x90	0.8				
7		171		110		100x90	0.9				
9		194		125		120x130	1.3				
										0.6	1500