



V E R T I C A L  
collection


Alulight

Alulight

Alulight is a typical round conical poles but with valuable advantage to the steel solution. Alulight are light to carry and install. Their larger and straight base is offering a large volume to fit the electrical devices. They are safe under car impact for the passengers. They don't required any maintenance. Long lasting Spectrocoloration could be used on. The Alulight series is manufactured in 100% aluminium and contributes to sustainable development.

Specifications

The shaft is round conical excepted the base, including the door area, which is straight tubular to ease the installation and door positioning. Made with inversed extrusion process from 6060 T5 aluminium alloy complying with EN755-2 extrusion standard. Spun then brushed with 120gr sandbrushing linen. Large base diameters to fit the electrical devices. Available from 3.50m to 10.00m with flange plate or root. Finish: Baked polyester powder coat or Spectrocoloration. Designed according to EN40 Standard and CE marked.

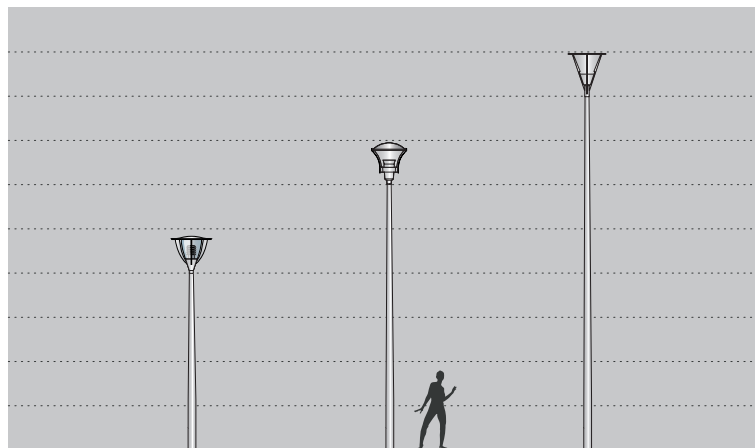

Données techniques

| m  | mm | mm  | mm      | mm | mm  | mm    | mm  | mm                  | m   | m                   | m    |     |      |
|----|----|-----|---------|----|-----|-------|-----|---------------------|-----|---------------------|------|-----|------|
| 4  | 60 | 114 | 400     | 60 | 600 | 67x60 | 200 | J16/M14<br>x<br>300 | 0.4 | 0.5                 | 1000 |     |      |
| 5  |    | 120 |         | 75 |     | 71x75 |     |                     |     |                     |      |     |      |
| 6  |    | 150 | 500     | 95 | 500 | 85x95 |     |                     |     |                     |      | 0.6 | 0.6  |
| 7  |    |     |         |    |     | 77x95 |     |                     |     |                     |      |     |      |
| 8  |    |     |         |    |     | 165   | 100 | 94x140              | 300 | J20/M18<br>x<br>400 | 0.5  | 0.8 | 1500 |
| 9  |    |     |         |    |     |       |     |                     |     |                     |      | 0.9 |      |
| 10 |    | 180 | 106x140 | 1  | 0.8 | 1700  |     |                     |     |                     |      |     |      |